




●ポリプロピレン/ポリエステル・フィルム・コンデンサ
オーディオ用

EPLPシリーズ

■ 特徴

- ・無誘導構造により微弱信号回路や位相補正回路に最適。
- ・安定した温度特性。
- ・リード線はOFC線或いはCP線を指定可能。
- ・原音を忠実に再現するクリアーサウンド。

■ 寸法図/DIAGRAM OF DIMENSIONS

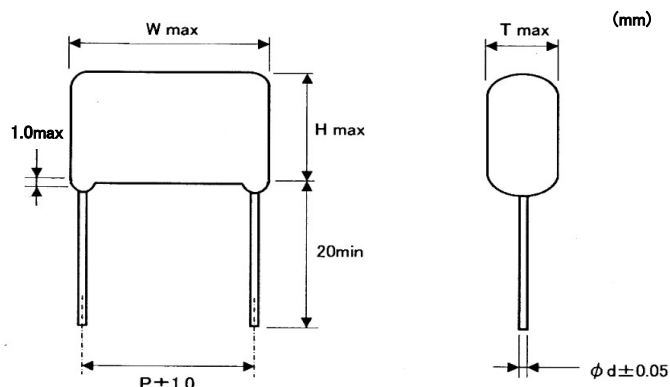

■ 寸法表/DIMENSIONS

Symbol	μ F	Parts No.	W	H	T	F	φ d		
							U	Y	Z
101	0.00010	2EEPLP□□101J□E	10.5	9.5	6.0	5.0	0.6	0.5	0.5
121	0.00012	2EEPLP□□121J□E	10.5	9.5	6.0	5.0	0.6	0.5	0.5
151	0.00015	2EEPLP□□151J□E	10.5	9.5	6.0	5.0	0.6	0.5	0.5
181	0.00018	2EEPLP□□181J□E	10.5	9.5	6.0	5.0	0.6	0.5	0.5
221	0.00022	2EEPLP□□221J□E	10.5	9.5	6.0	5.0	0.6	0.5	0.5
271	0.00027	2EEPLP□□271J□E	10.5	9.5	6.0	5.0	0.6	0.5	0.5
331	0.00033	2EEPLP□□331J□E	10.5	9.5	6.0	5.0	0.6	0.5	0.5
361	0.00036	2EEPLP□□361J□E	10.5	9.5	6.0	5.0	0.6	0.5	0.5
391	0.00039	2EEPLP□□391J□E	10.5	9.5	6.0	5.0	0.6	0.5	0.5
471	0.00047	2EEPLP□□471J□E	10.5	9.5	6.0	5.0	0.6	0.5	0.5
561	0.00056	2EEPLP□□561J□E	10.5	9.5	6.0	5.0	0.6	0.5	0.5
621	0.00062	2EEPLP□□621J□E	10.5	9.5	6.0	5.0	0.6	0.5	0.5
681	0.00068	2EEPLP□□681J□E	10.5	9.5	6.0	5.0	0.6	0.5	0.5
821	0.00082	2EEPLP□□821J□E	10.5	9.5	6.0	5.0	0.6	0.5	0.5
102	0.0010	2EEPLP□□102J□E	10.5	9.5	6.0	5.0	0.6	0.5	0.5
122	0.0012	2EEPLP□□122J□E	10.5	9.5	6.0	5.0	0.6	0.5	0.5
152	0.0015	2EEPLP□□152J□E	10.5	9.5	6.0	5.0	0.6	0.5	0.5
182	0.0018	2EEPLP□□182J□E	10.5	9.5	6.0	5.0	0.6	0.5	0.5
222	0.0022	2EEPLP□□222J□E	10.5	9.5	6.0	5.0	0.6	0.5	0.5
272	0.0027	2EEPLP□□272J□E	10.5	9.5	6.0	5.0	0.6	0.5	0.5
332	0.0033	2EEPLP□□332J□E	10.5	9.5	6.0	5.0	0.6	0.5	0.5
392	0.0039	2EEPLP□□392J□E	10.5	9.5	6.0	5.0	0.6	0.5	0.5
472	0.0047	2EEPLP□□472J□E	10.5	10.5	6.5	5.0	0.6	0.5	0.5
562	0.0056	2EEPLP□□562J□E	10.5	10.5	6.5	5.0	0.6	0.5	0.5
682	0.0068	2EEPLP□□682J□E	10.5	10.5	6.5	5.0	0.6	0.5	0.5
103	0.010	2EEPLP□□103J□E	10.5	10.5	6.5	5.0	0.6	0.5	0.5
223	0.022	2EEPLP□□223J□E	15.5	13.0	6.5	5.0	0.6	0.5	0.5
473	0.047	2EEPLP□□473J□E	15.5	18.5	8.5	5.0	0.6	0.5	0.5
104	0.10	2EEPLP□□104J□E	18.5	20.0	9.0	5.0	0.6	0.5	0.5

●POLYPROPYLENE/POLYESTER FILM CAPACITORS
FOR AUDIO USE

TYPE EPLP

■ FEATURES

- ・It's most suitable for a weak signal circuit and a phase correction circuit by non-inductive structure.
- ・The stable temperature special quality.
- ・Lead wire can designate OFC wire or CP wire.
- ・The clear sound which reproduces a fundamental note faithfully.

■ 性能/PERFORMANCE SPECIFICATIONS

- ・使用温度範囲/Temperature range : $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- ・定格電圧/Rated voltage : 250VDC
- ・静電容量範囲/Capacitance range : $0.0001 \sim 0.1 \mu\text{F}$
- ・静電容量許容範囲/Capacitance tolerance : $\pm 5\%$ (J)
- ・誘電正接/Dissipation factor : $\leq 0.5\%$ (1kHz, $\pm 20\%$)
- ・耐電圧/Withstand voltage
端子間/Between terminals : Rated voltage $\times 200\%$, 60s
- ・絶縁抵抗/Insulation resistance : $\geq 10000\text{M}\Omega$

■ 品番ご指定法/HOW TO SPECIFY ITEM NUMBER

2E EPLP □□ 101 J □E

- リード線材質/Lead wire material
- 静電容量許容差/Capacitance tolerance
- 静電容量記号/Capacitance symbol
- 形状記号/Style symbol
- シリーズ名/Series name
- 定格電圧/Rated voltage

※リード加工形状/Leads processing.

- ・FD: リードフォーミング品/Lead forming products
- ・TF: テーピング品 ($0.0001 \mu\text{F} \sim 0.01 \mu\text{F}$ まで対応可能)/Taping products (Available from $0.0001 \mu\text{F}$ to $0.01 \mu\text{F}$)
- ・TL: テーピング品 ($0.022 \mu\text{F} \sim 0.1 \mu\text{F}$ まで対応可能)/Taping products (Available from $0.022 \mu\text{F}$ to $0.1 \mu\text{F}$)

※リード線材質/Lead wire material

- ・U: OFC線(錫メッキ無酸素銅線/Tin plating oxygen free copper wire) $\phi 0.6\text{mm}$
- ・Y: CP線(銅下地錫メッキ軟銅線/Copper base tin-plated steel wire) $\phi 0.5\text{mm}$
- ・Z: OFC線(錫メッキ無酸素銅線/Tin plating oxygen free copper wire) $\phi 0.5\text{mm}$