


●ラジアルリード形(CE-04) リード加工仕様／
RADIAL LEAD (CE-04) TYPE LEADS PROCESS

■リードフォーミング／LEADS FORMING


記号/Symbol : **F A** (スナップイン/Snap-in)

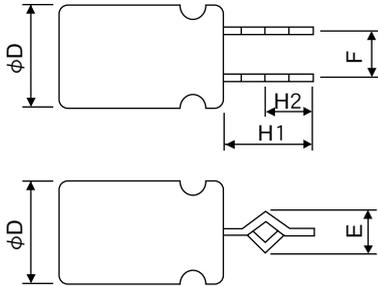

Unit : mm

φD	10	12.5	16	18
H 1 ±0.5	4.5	4.5	4.5	4.5
H 2 ±0.5	2.8	2.8	2.8	2.8
F ±0.5	5.0	5.0	7.5	7.5
E ±0.5	2.0	2.0	2.0	2.0

記号/Symbol : **F B** (フォーミングカット/Forming cut)

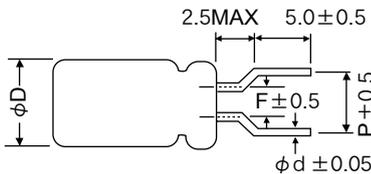


Unit : mm

φD	4		5		6.3		8		
L	5	7	5,7	11.0	5,7	11.0	5	7	11.5
φd	0.45	0.45	0.5	0.45	0.5	0.45	0.6		
F	1.5	2.0	2.5	2.5	3.5				
P	5.0	5.0	5.0	5.0	5.0				

■リードカット／LEADS CUTTING

記号/Symbol : **FC , GC , HC**




Unit : mm

記号/Symbol	H	φD	5	6.3	8	10	12.5	16	18	22
FC	5.0	L	11.0	11.0	11.5					
GC	4.0	φd	0.5	0.5	0.6	0.6		0.8		
HC	3.5	F	2.0	2.5	3.5	5.0		7.5	10	

■L形フォーミング／L SHAPE FORMING

記号/Symbol : **FF , FG , LF , LG**

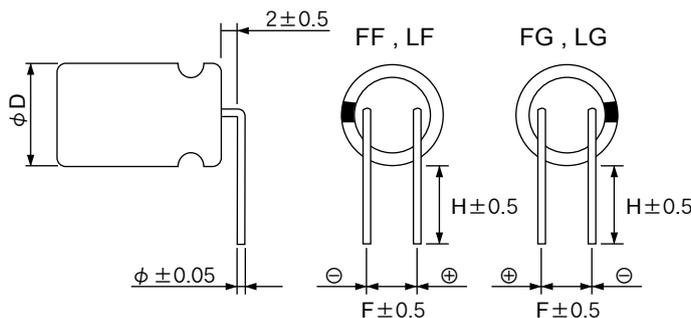

Unit : mm

記号/Symbol	H	φD	10	12.5	16	18
FF	4.0	F	5.0	5.0	7.5	7.5
FG						
LF	3.5	φd	0.6	0.6	0.8	0.8
LG						

※その他の加工については、別途お問い合わせ下さい。Please make inquiries specially about other leads forming type.